


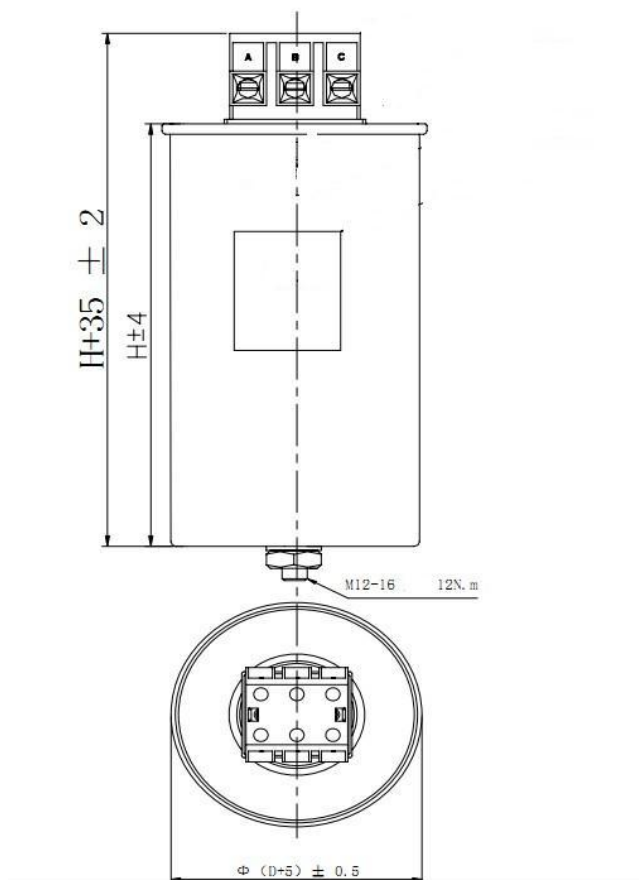

A Type

Three phase capacitors: 250 V, 50 Hz, MKP, Cylindrical

Type	Rated Voltage	Rated Capacitance	Rated Current	Dimension	QTY	Terminal type
	(V)	(KVAR)	(A)	D*H (mm)		
BKMJ0.25-5-3	250	5	11.5	Φ86*240-M12*16	13	A
BKMJ0.25-7.5-3	250	7.5	17.3	Φ86*240-M12*16	9	A
BKMJ0.25-10-3	250	10	23.0	Φ86*260-M12*16	9	A

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Standard: IEC 60831