



Three phase capacitors: 400 V, 50 Hz, MKP, Cylindrical

Type	Rated Voltage	Rated Capacitance	Rated Current	Dimension	QTY	Terminal type
	(V)	(KVAR)	(A)	D*H (mm)		
BKMJ0.4-5-3	400	5	7.2	Φ65*240-M12*16	13	A
BKMJ0.4-7.5-3	400	7.5	10.8	Φ65*240-M12*16	13	A
BKMJ0.4-8-3	400	8	11.5	Φ65*240-M12*16	13	A
BKMJ0.4-10-3	400	10	14.4	Φ76*240-M12*16	9	A
BKMJ0.4-12-3	400	12	17.3	Φ76*240-M12*16	9	A
BKMJ0.4-15-3	400	15	21.7	Φ86*240-M12*16	9	A
BKMJ0.4-16-3	400	16	23.0	Φ86*240-M12*16	9	A
BKMJ0.4-18-3	400	18	26.0	Φ96*240-M12*25	6	A
BKMJ0.4-20-3	400	20	28.9	Φ96*240-M12*25	6	A
BKMJ0.4-22-3	400	22	31.8	Φ96*240-M12*25	6	B
BKMJ0.4-25-3	400	25	36.0	Φ106*240-M12*25	6	B
BKMJ0.4-30-3	400	30	43.3	Φ106*280-M12*25	6	B

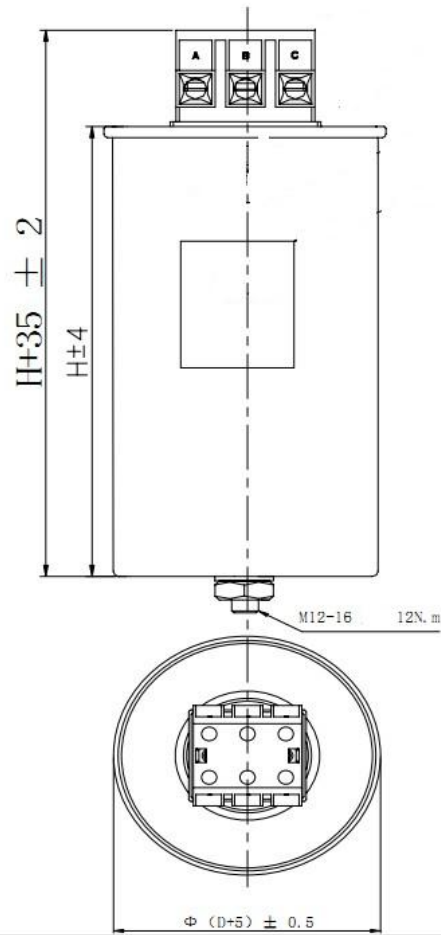

A Type

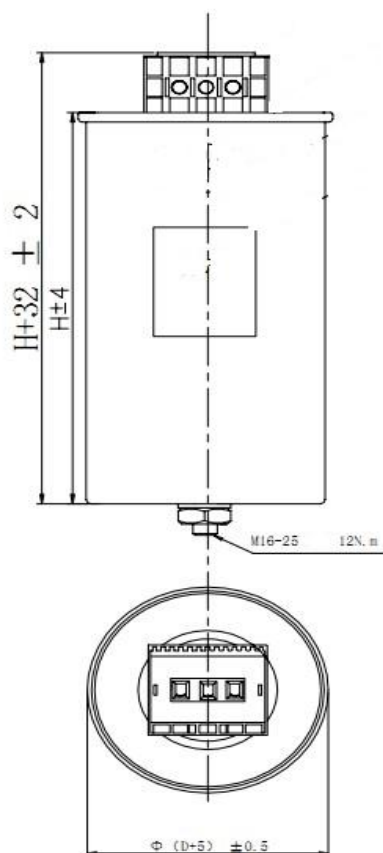

B Type

Technical data:

Temperature category: -25°C -50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Standard: IEC 60831