


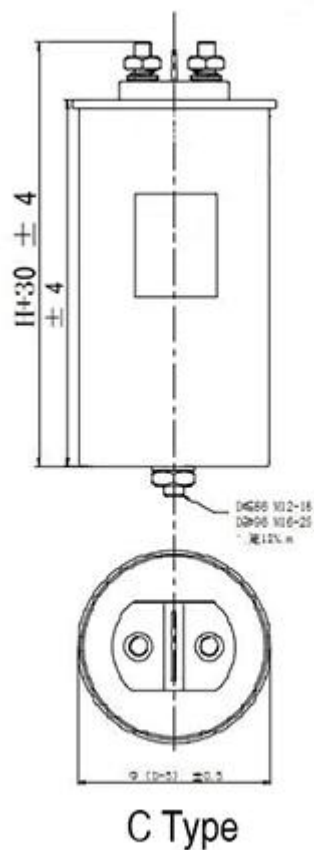

Single phase capacitors: 230 V, 50 Hz, Cylindrical

Type	Rated Voltage	Rated Capacitance	Rated Current	Dimension	QTY	Terminal type
	(V)	(KVAR)	(A)	D*H (mm)		
BKMJ0.23-3-1	230	3	13.0	Φ65*140-M12*16	13	C
BKMJ0.23-5-1	230	5	21.7	Φ65*210-M12*16	13	C
BKMJ0.23-7.5-1	230	7.5	32.6	Φ65*240-M12*16	13	C
BKMJ0.23-10-1	230	10	43.5	Φ65*240-M12*17	13	C
BKMJ0.23-15-1	230	15	62.2	Φ96*240-M16*25	13	C

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Standard: IEC 60831