


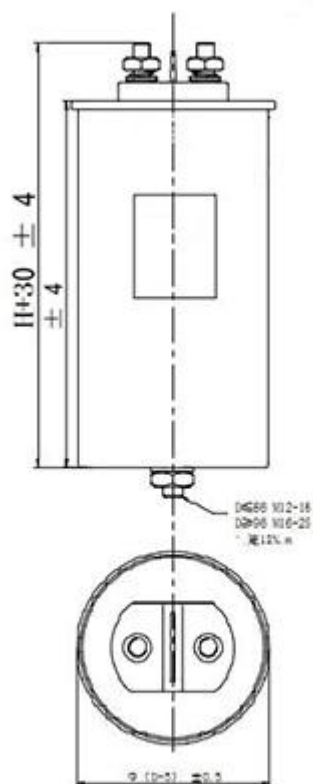

C Type

Single phase capacitors: 400 V, 50 Hz, Cylindrical

Type	Rated Voltage	Rated Capacitance	Rated Current	Dimension	QTY	Terminal type
	(V)	(KVAR)	(A)	D*H (mm)		
BKMJ0.4-5-1	400	5	12.5	$\Phi 65 \times 240$ -M12*16	13	C
BKMJ0.4-7.5-1	400	7.5	18.8	$\Phi 65 \times 240$ -M12*16	13	C
BKMJ0.4-8-1	400	8	20.0	$\Phi 65 \times 240$ -M12*16	13	C
BKMJ0.4-10-1	400	10	25.0	$\Phi 76 \times 240$ -M12*16	9	C
BKMJ0.4-12-1	400	12	30.0	$\Phi 76 \times 240$ -M12*16	9	C
BKMJ0.4-15-1	400	15	37.5	$\Phi 86 \times 240$ -M12*16	9	C
BKMJ0.4-16-1	400	16	40.0	$\Phi 86 \times 240$ -M12*16	9	C
BKMJ0.4-18-1	400	18	45.0	$\Phi 96 \times 240$ -M12*25	6	C
BKMJ0.4-20-1	400	20	50.0	$\Phi 96 \times 240$ -M12*25	6	C
BKMJ0.4-22-1	400	22	55.0	$\Phi 96 \times 240$ -M12*25	6	C
BKMJ0.4-25-1	400	25	62.5	$\Phi 106 \times 240$ -M12*25	6	C
BKMJ0.4-30-1	400	30	75.0	$\Phi 106 \times 280$ -M12*25	6	C

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type,non PCB

Tandard: IEC 60831



Website:<http://www.wascapacitor.com> Tell:86-757-26937167 E-mail:sales@wasvar.com