


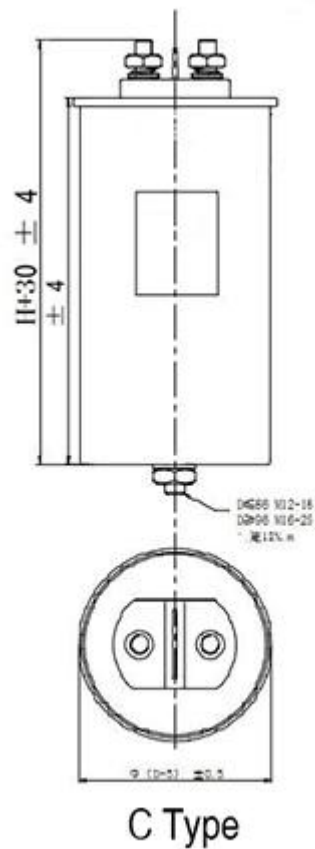

Single phase capacitors: 450 V, 50 Hz, Cylindrical

Type	Rated Voltage	Rated Capacitance	Rated Current	Dimension	QTY	Terminal type
	(V)	(KVAR)	(A)	D*H (mm)		
BKMJ0.45-5-1	450	5	11.1	$\Phi 65 \times 240$ -M12*16	13	C
BKMJ0.45-7.5-1	450	7.5	16.7	$\Phi 65 \times 240$ -M12*16	13	C
BKMJ0.45-8-1	450	8	17.8	$\Phi 65 \times 240$ -M12*16	13	C
BKMJ0.45-10-1	450	10	22.2	$\Phi 65 \times 240$ -M12*16	13	C
BKMJ0.45-12-1	450	12	26.7	$\Phi 76 \times 240$ -M12*16	9	C
BKMJ0.45-15-1	450	15	33.3	$\Phi 76 \times 240$ -M12*16	9	C
BKMJ0.45-16-1	450	16	35.6	$\Phi 86 \times 240$ -M12*16	9	C
BKMJ0.45-18-1	450	18	40.0	$\Phi 86 \times 240$ -M12*16	9	C
BKMJ0.45-20-1	450	20	44.5	$\Phi 86 \times 240$ -M12*16	9	C
BKMJ0.45-22-1	450	22	48.9	$\Phi 96 \times 240$ -M16*25	6	C
BKMJ0.45-25-1	450	25	55.6	$\Phi 96 \times 240$ -M16*25	6	C
BKMJ0.45-30-1	450	30	66.7	$\Phi 106 \times 240$ -M16*25	6	C
BKMJ0.45-35-1	450	35	77.8	$\Phi 106 \times 280$ -M16*25	6	C

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Tandard: IEC 60831



Website: <http://www.wasvarcapacitor.com> Tell: 86-757-26937167 E-mail: sales@wasvar.com