


Single phase capacitors: 480 V, 50 Hz, Cylindrical

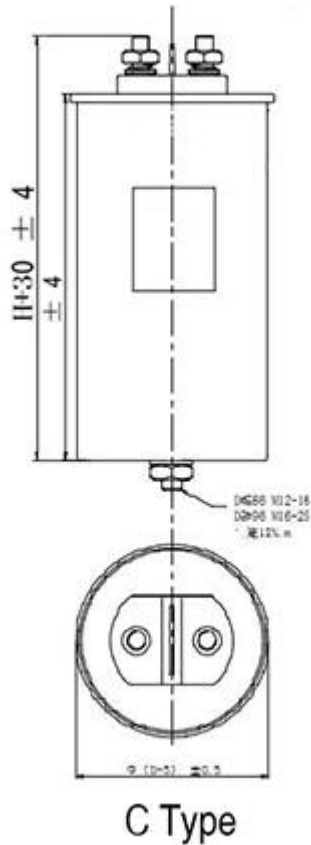

Type	Rated Voltage	Rated Capacitance	Rated Current	Dimension	QTY	Terminal type
	(V)	(KVAR)	(A)	D*H (mm)		
BKMJ0.48-5-1	480	5	10.4	Φ65*240-M12*16	13	C
BKMJ0.48-7.5-1	480	7.5	15.6	Φ65*240-M12*16	13	C
BKMJ0.48-8-1	480	8	16.7	Φ65*240-M12*16	13	C
BKMJ0.48-10-1	480	10	20.8	Φ76*240-M12*16	9	C
BKMJ0.48-12-1	480	12	25.0	Φ76*240-M12*16	9	C
BKMJ0.48-15-1	480	15	31.3	Φ86*240-M12*16	9	C
BKMJ0.48-16-1	480	16	33.3	Φ86*240-M12*16	9	C
BKMJ0.48-18-1	480	18	37.5	Φ86*240-M12*16	9	C
BKMJ0.48-20-1	480	20	41.7	Φ96*240-M16*25	6	C
BKMJ0.48-22-1	480	22	45.8	Φ96*240-M16*25	6	C
BKMJ0.48-25-1	480	25	52.1	Φ106*240-M16*25	6	C
BKMJ0.48-30-1	480	30	62.5	Φ116*240-M16*25	6	C
BKMJ0.48-35-1	480	35	72.9	Φ116*280-M16*25	6	C

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type,non PCB

Tandard: IEC 60831



Website:<http://www.wascapacitor.com> Tell:86-757-26937167 E-mail:sales@wasvar.com