



Three phase capacitors: 415 V, 50 Hz, Oval

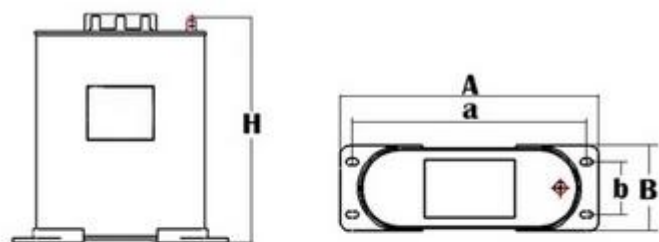

Pattem D

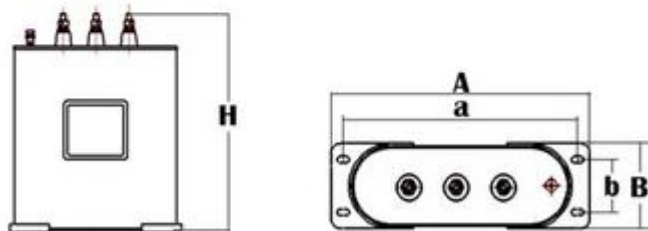

Pattem E

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current	Dimension	Terminal type
	(V)	(KVAR)	(uF)	(A)	A*B*H/a*b(mm)	
BKMJ0.415-10-3	415	10	185	13.9	179*72*186/179*58	D
BKMJ0.415-15-3	415	15	278	20.9	179*72*226/179*58	
BKMJ0.415-20-3	415	20	370	27.8	179*72*246/179*58	
BKMJ0.415-25-3	415	25	463	34.8	230*82*240/215*66	E
BKMJ0.415-30-3	415	30	555	41.7	230*82*260/215*66	
BKMJ0.415-40-3	415	40	740	55.6	230*82*300/215*66	

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Tandard: IEC 60831