



Three phase capacitors: 450 V, 50 Hz, Oval

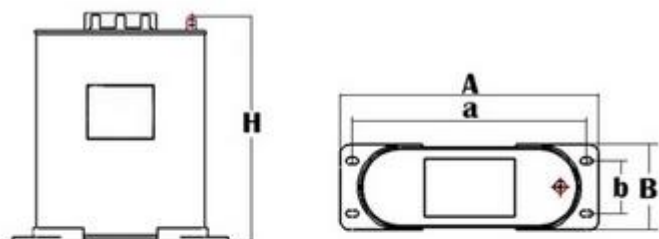

Pattem D

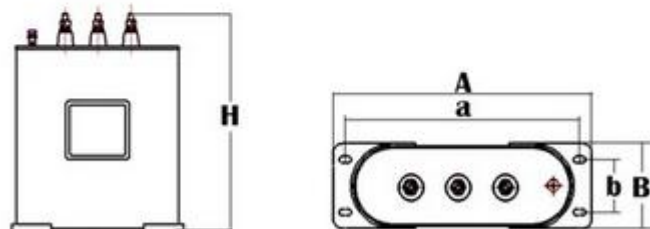

Pattem E

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current	Dimension	Terminal type
	(V)	(KVAR)	(uF)	(A)	A*B*H/a*b(mm)	
BKMJ0.450-10-3	450	10	175	12.8	195*72*186/179*58	D
BKMJ0.450-15-3	450	15	236	19.2	195*72*186/179*58	
BKMJ0.450-20-3	450	20	314	25.7	195*72*226/179*58	
BKMJ0.450-25-3	450	25	393	32.1	230*82*240/215*66	E
BKMJ0.450-30-3	450	30	471	38.5	230*82*240/215*66	
BKMJ0.450-40-3	450	40	628	51.3	230*82*300/215*66	

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type,non PCB

Tandard: IEC 60831