



Three phase capacitors: 525 V, 50 Hz, Oval

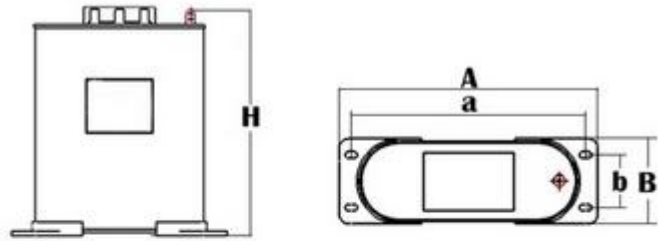

Pattem D

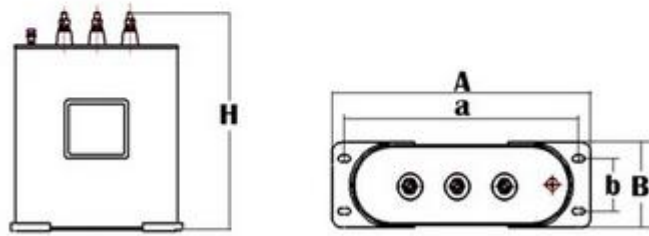

Pattem E

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current	Dimension	Terminal type
	(V)	(KVAR)	(uF)	(A)	A*B*H/a*b(mm)	
BKMJ0.525-15-3	525	15	174	16.5	195*72*226/179*58	D
BKMJ0.525-20-3	525	20	231	22.0	195*72*226/179*58	
BKMJ0.525-25-3	525	25	289	27.5	230*82*260/215*66	E
BKMJ0.525-30-3	450	30	347	33.0	230*82*300/215*66	

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type,non PCB

Tandard: IEC 60831