


Pattem D

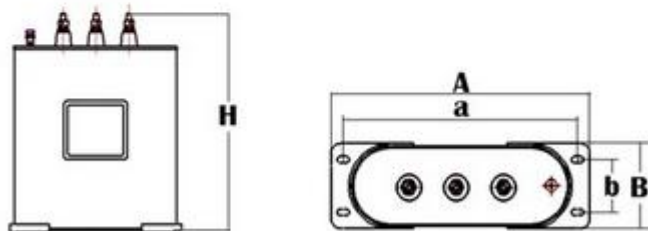

Pattem E

Three phase capacitors: 690 V, 50 Hz, Oval

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current (A)	Dimension A*B*H/a*b(mm)	Terminal type
	(V)	(KVAR)	(uF)			
BKMJ0.69-10-3	690	10	67	8.4	195*72*226/179*58	D
BKMJ0.69-15-3	690	15	101	12.6	195*72*226/179*58	
BKMJ0.69-20-3	690	20	134	16.8	195*72*226/179*58	
BKMJ0.69-30-3	690	30	201	25.2	230*82*260/25*66	E

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Tandard: IEC 60831