


Three phase capacitors: 250 V, 50 Hz, Box/Square Type

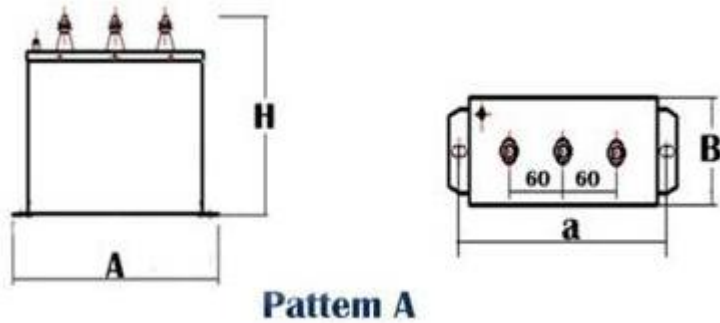

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current	Dimension	Terminal type
	(V)	(KVAR)	(uF)	(A)	A*B*H/a (mm)	
BKMJ0.25-5-3	250	5	255	11.5	272*74*320/247	A
BKMJ0.25-10-3	250	10	510	23.1	272*74*320/247	A
BKMJ0.25-15-3	250	15	764	34.6	345*112*310/315	A

**Technical data:**

**Temperature category:** -25°C-50°C

**Discharge resistors:** 75 V/ 3 min

**Dielectric:** MKP - metallized PP film

**Design:** dry type, non PCB

**Tandard:** IEC 60831