


Three phase capacitors: 400 V, 50 Hz, Box/Square Type

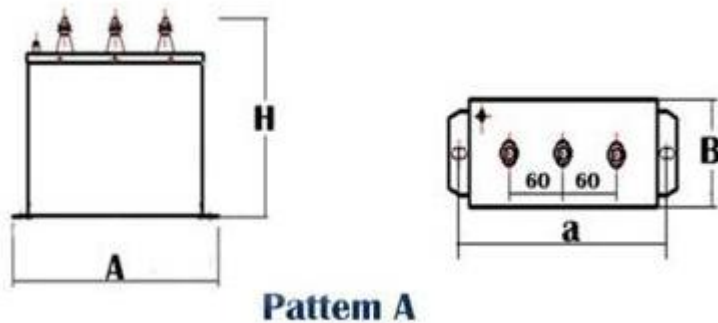

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current	Dimension	Terminal type
	(V)	(KVAR)	(uF)	(A)	A*B*H/a (mm)	
BKMJ0.4-20-3	400	20	398	28.9	234*128*300/219	A
BKMJ0.4-25-3	400	25	498	36.0	234*128*300/219	A
BKMJ0.4-30-3	400	30	597	43.3	234*128*300/219	A
BKMJ0.4-40-3	400	40	796	57.7	386*128*310/358	A
BKMJ0.4-50-3	400	50	995	72.2	441*130*310/413	A

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Tandard: IEC 60831