


### Three phase capacitors: 415 V, 50 Hz, Box/Square Type

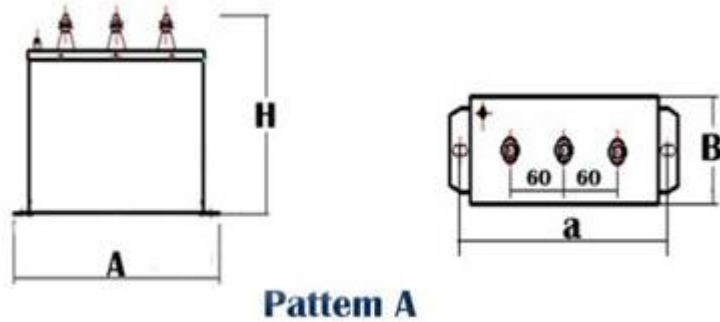

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current	Dimension	Terminal type
	(V)	(KVAR)	(uF)	(A)	A*B*H/a (mm)	
BKMJ0.415-15-3	415	15	278	20.9	250*67*285/225	A
BKMJ0.415-25-3	415	25	462	34.8	234*128*300/219	A
BKMJ0.415-30-3	415	30	555	41.7	345*112*310/315	A
BKMJ0.415-40-3	415	40	739	55.6	386*128*310/358	A
BKMJ0.415-50-3	415	50	925	69.6	441*130*310/413	A
BKMJ0.415-75-3	415	75	1387	104.3	441*175*330/413	A
BKMJ0.415-100-3	415	100	1849	139.1	441*193*330/413	A

**Technical data:**

**Temperature category:** -25°C-50°C

**Discharge resistors:** 75 V/ 3 min

**Dielectric:** MKP - metallized PP film

**Design:** dry type, non PCB

**Tandard:** IEC 60831