


Three phase capacitors: 450 V, 50 Hz, Box/Square Type

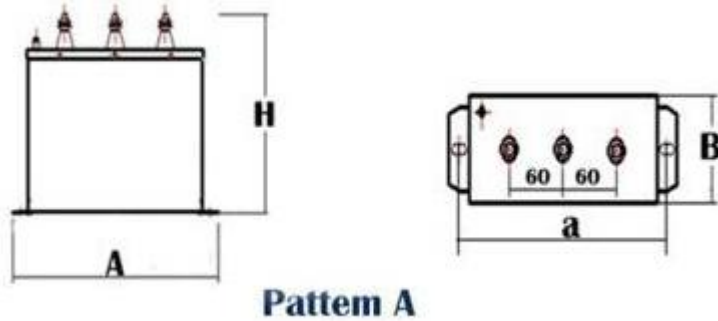

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current	Dimension	Terminal type
	(V)	(KVAR)	(uF)	(A)	A*B*H/a (mm)	
BKMJ0.45-10-3	450	10	157	12.8	252*67*240/225	A
BKMJ0.45-20-3	450	20	314	25.7	234*128*300/219	A
BKMJ0.45-25-3	450	25	393	32	234*128*300/219	A
BKMJ0.45-30-3	450	30	472	38.5	234*128*300/219	A
BKMJ0.45-40-3	450	40	629	51.3	386*128*310/358	A
BKMJ0.45-50-3	450	50	786	64.2	386*128*310/358	A

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Tandard: IEC 60831