


Three phase capacitors: 525 V, 50 Hz, Box/Square Type

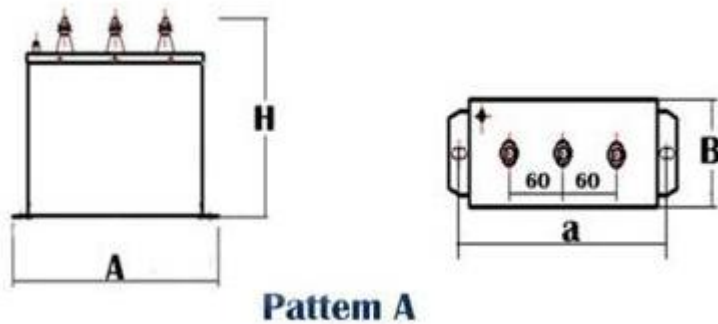

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current	Dimension	Terminal type
	(V)	(KVAR)	(uF)	(A)	A*B*H/a (mm)	
BKMJ0.525-10-3	525	10	115	11.0	252*67*285/225	A
BKMJ0.525-20-3	525	20	231	22.0	234*128*300/219	A
BKMJ0.525-25-3	525	25	289	27.5	234*128*300/219	A
BKMJ0.525-30-3	525	30	346	33.0	234*128*300/219	A
BKMJ0.525-40-3	525	40	462	44.0	386*128*310/358	A
BKMJ0.525-50-3	525	50	577	55.0	386*128*310/358	A

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Tandard: IEC 60831