


Pattern B

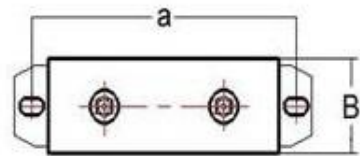

Single phase capacitors: 400 V, 50 Hz, Box/Square Type

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current	Dimension	Terminal type
	(V)	(KVAR)	(uF)	(A)	A*B*H/a (mm)	
BKMJ0.4-20-1	400	20	398	50.0	234*128*300/219	B
BKMJ0.4-25-1	400	25	498	62.5	234*128*300/219	B
BKMJ0.4-30-1	400	30	597	75.0	234*128*300/219	B
BKMJ0.4-40-1	400	40	796	100.0	386*128*310/358	B
BKMJ0.4-50-1	400	50	995	125.0	441*130*310/413	B

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Tandard: IEC 60831

