


Single phase capacitors: 450 V, 50 Hz, Box/Square Type

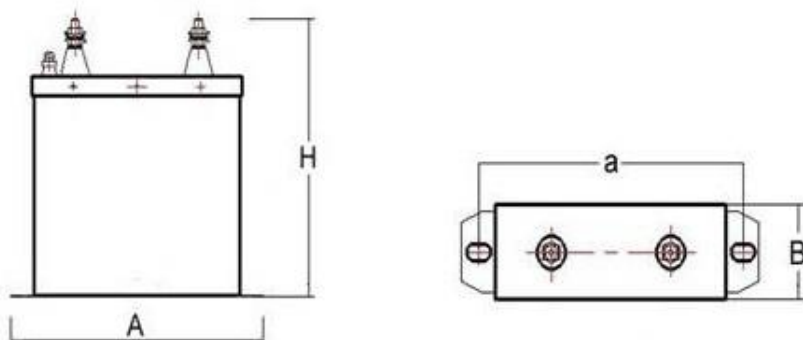

Pattern B

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current	Dimension	Terminal type
	(V)	(KVAR)	(uF)	(A)	A*B*H/a (mm)	
BKMJO.45-10-1	450	10	157	22.2	252*67*240/225	B
BKMJO.45-20-1	450	20	314	44.4	234*128*300/219	B
BKMJO.45-25-1	450	25	393	55.6	234*128*300/219	B
BKMJO.45-30-1	450	30	472	66.7	234*128*300/219	B
BKMJO.45-40-1	450	40	629	88.9	386*128*310/358	B
BKMJO.45-50-1	450	50	786	111.1	386*128*310/358	B

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Standard: IEC 60831