


Single phase capacitors: 525 V, 50 Hz, Box/Square Type

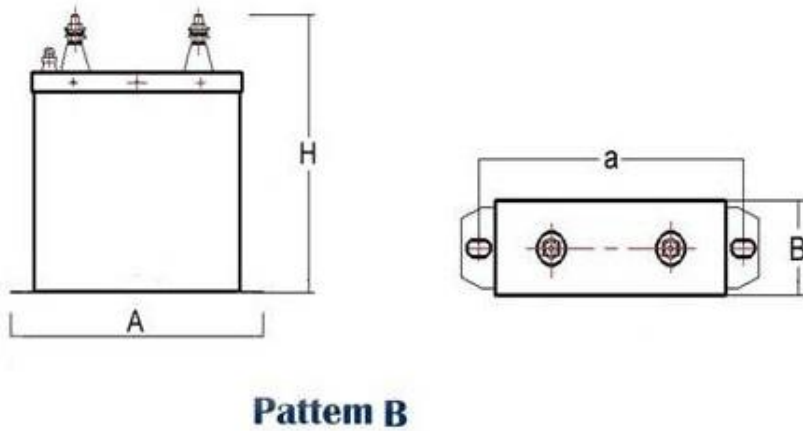

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current	Dimension	Terminal type
	(V)	(KVAR)	(uF)	(A)	A*B*H/a (mm)	
BKMJ0.525-10-1	525	10	115	19.0	252*67*285/225	B
BKMJ0.525-20-1	525	20	231	38.0	234*128*300/219	B
BKMJ0.525-25-1	525	25	289	47.6	234*128*300/219	B
BKMJ0.525-30-1	525	30	346	57.1	234*128*300/219	B
BKMJ0.525-40-1	525	40	462	76.2	386*128*310/358	B
BKMJ0.525-50-1	525	50	577	95.2	386*128*310/358	B

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Tandard: IEC 60831